



Shaft ladder LW 300mm

9623101



GTIN: 4007126032898

Certified as compliant with current European directives

Material
steel hot dip galvanized 1.0037 / ASTM A36

Length in m | Number of rungs
2,80 m | 10 Rungs

- Hailo shaft ladders are non-corroding and have easy-grip rail profiles. The perforated profile ensures non-slip, foot-sure rungs.
 - Wall brackets: 1 pair of wall brackets at least every 1.96 m
 - Other lengths can be achieved by combining the basic ladders according to the depth of the structure
 - Shorter ladders, special lengths and widths and special profiles available on request
-
- Rail: square profile 40x20mm
 - Rungs: perforated U-profile 30x30mm

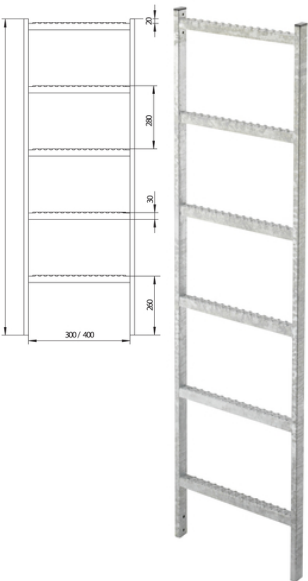

Specifications

Width in mm	300
Rung spacing 280mm	✓
Number of rungs	10
Length in m	2,80
Material	steel hot dip galvanized 1.0037 / ASTM A36

PRODUCT SPECIFICATION SHEET



Length in m Number of rungs	2,80 m 10 Rungs
-------------------------------	-------------------