



## Shaft ladder LW 300mm

**9623101**

GTIN: 4007126032898

Certified as compliant with current European directives

**Material**



steel hot dip galvanized 1.0037 / ASTM A36

Length in m | Number of rungs

2,80 m | 10 Rungs



- Hailo shaft ladders are non-corroding and have easy-grip rail profiles. The perforated profile ensures non-slip, foot-sure rungs.
  - Wall brackets: 1 pair of wall brackets at least every 1.96 m
  - Other lengths can be achieved by combining the basic ladders according to the depth of the structure
  - Shorter ladders, special lengths and widths and special profiles available on request
- Rail: square profile 40x20mm
  - Rungs: perforated U-profile 30x30mm

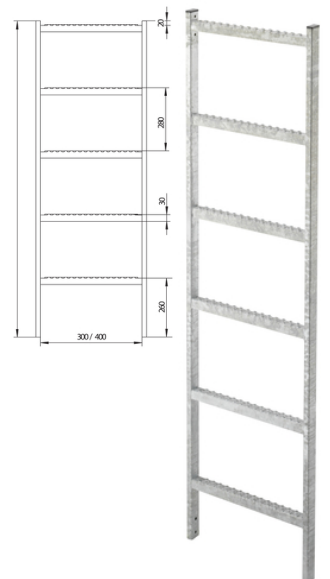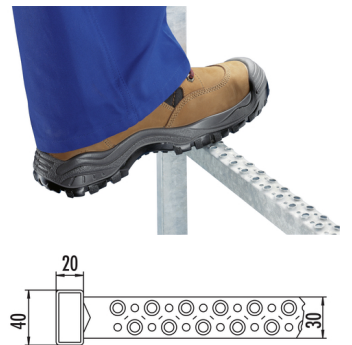

**Specifications**

Width in mm	300
Rung spacing 280mm	✓
Number of rungs	10
Length in m	2,80
Material	steel hot dip galvanized 1.0037 / ASTM A36

# PRODUCT SPECIFICATION SHEET

---



Length in m | Number of rungs

2,80 m | 10 Rungs

---