Shaft ladder LW 400mm

9624031

GTIN: 4007126005922

Certified as compliant with current European directives

Material
steel hot dip galvanized 1.0037 / ASTM A36

Length in m | Number of rungs
0,84 m | 3 Rungs



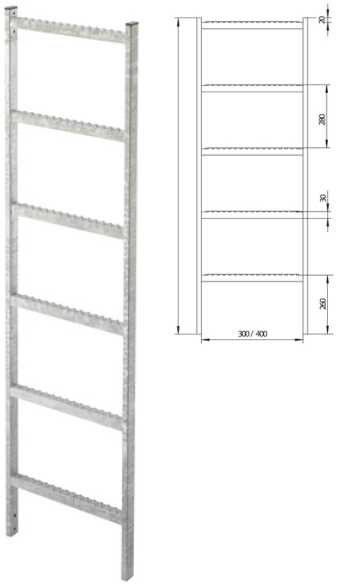

- Hailo shaft ladders are non-corroding and have easy-grip rail profiles
- The perforated profile ensures non-slip, foot-sure rungs
- Wall brackets: 1 pair of wall brackets at least every 1.96 m
- Other lengths can be achieved by combining the basic ladders according to the depth of the structure
- Shorter ladders, special lengths and widths and special profiles available on request

- Rail: square profile 40x20mm
- Rungs: perforated U-profil 30x30mm

Specifications

Width in mm	400
Rung spacing 280mm	✔
Number of rungs	3
Length in m	0,84
Material	steel hot dip galvanized 1.0037 / ASTM A36

Copyright © 2026 Hailo. Alle Rechte vorbehalten.

PRODUCT SPECIFICATION SHEET

Length in m | Number of rungs	0,84 m | 3 Rungs

Copyright © 2026 Hailo. Alle Rechte vorbehalten.