# Ladders with a safety Cage

## 6047172

GTIN: 4007126010865

Application as fixed vertical ladders for buildings and machinery, suitable for indoor and outdoor use. Some of the images show accessories that are subject to an additional charge

Material
Aluminium, uncoated + Steel, galvanised

Length in m | Number of rungs
4,76 m | 17 Rungs

- Single-flight according to the basic requirements of DIN 18799

- Resistant to corrosion in neutral and slightly acidic environments
- Sturdy, easy-grip rail profiles
- Extendable using ladder connectors
- Easy to install
- Straight mounting surface required
- Fall arresting system / safety cage required: for fixed ladders on buildings and on machinery from a climbing height of 3000 mm

Scope of delivery:
Ladder sections, ladder connectors, ladder caps, wall brackets 185 mm, exit rail (AHB-K), exit extension, safety cage rail, rear safety cage vertical bars, bar connectors, caps, max. length for shipment 4200 mm, multi-section over 4200 mm

- Ladder sections can be shortened without risk of corrosion
- Non-slip rungs with crosswise and lengthwise profiling

## Specifications

| | |
|---|---|
| Ladder external width in mm | 490 |


Copyright © 2026 Hailo. Alle Rechte vorbehalten.

# PRODUCT SPECIFICATION SHEET

| | |
|---|---|
| Rung spacing 280mm | ✔ |
| Material | Aluminium, uncoated + Steel, galvanised |
| Length in m | 4,76 |
| safety cage basket Length in m | 3,64 |
| Number of rungs | 17 |
| Weight (KG) | 51,0 |
| Rail dimension | Square profile 72x25mm |
| Rung dimension | 30x30mm |
| Length in m \| Number of rungs | 4,76 m \| 17 Rungs |
| Width in mm | 440 |

Copyright © 2026 Hailo. Alle Rechte vorbehalten.

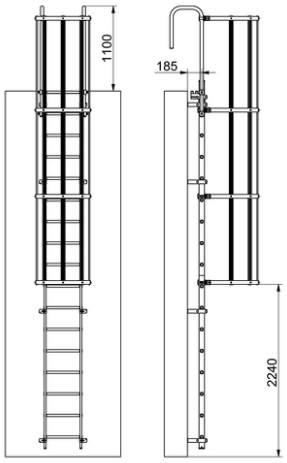


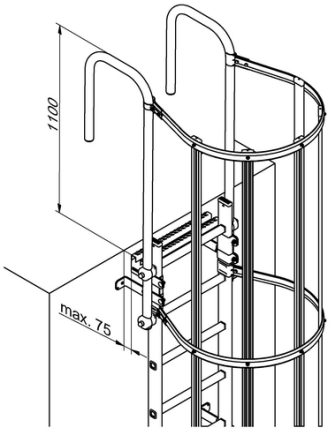

Copyright © 2026 Hailo. Alle Rechte vorbehalten.

Copyright © 2026 Hailo. Alle Rechte vorbehalten.

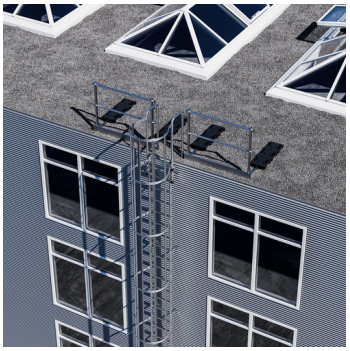

Copyright © 2026 Hailo. Alle Rechte vorbehalten.