



Typ AASS-1

9698611


GTIN: 4007126048295

Tested as an anchoring device for PSAgA (personal fall protection equipment) pursuant to DIN EN 795, class B. The extension arms were specially-developed for use with the fall protection safety device with rescue lift and/or winch. They can be supplied with floor mounts, retractable floor mounts or wall mounts.

- Specially-developed for fixed use in the event of safety and rescue operations for two people
- Lifting and lowering of loads
- Variable fixing options with floor mounts, retractable floor mounts or wall mounts
- Can be rapidly deployed in a different location
- Can be used with all HRA rescue equipment
- Robust, due to solid construction
- Envelope 750mm

Optionally available:

- PLW personnel and load winch, nominal load 300 kg
- IKLW 300 manually operated winch up to max. load 300 kg and with max. cable length 20 m
- Ground sleeve, retractable ground sleeve or wall sleeve and/or flange

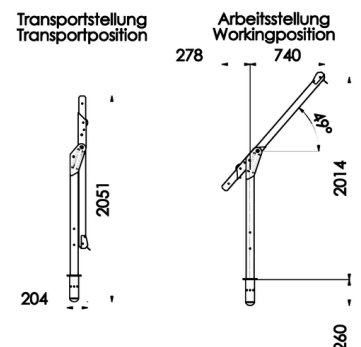



installation
-HRA devices

Specifications

Typ AASS-1	✓
Material	Stainless steel 1.4571 / AISI 316ti