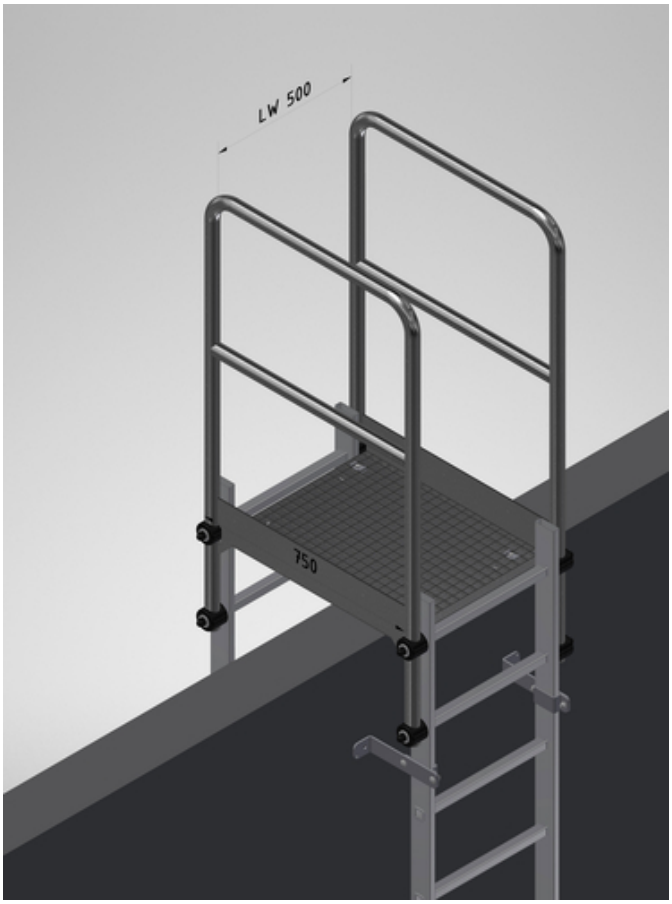

Attica crossing for rail 40x20mm

6015811

GTIN: 4007126601681

The bridging step is used to bridge and protect the parapet and any facing without slip resistance. The length of the bridging step is variable, the passage width must be at least 500 mm. In accordance with DIN 18799-3, fixed ladders with a fall height of 3m or more require a fall arrest system at the exit point so that the user is never unsecured. This is ensured with a guardrail of 1,500 mm on both sides or the parapet step-over unit with a depth of 2,500 mm.

Material
Stainless steel 1.4301 / AISI 304

Depth in mm
750

- Bridging the attic
- Blinding the attic
- LW: 500mm

Note on pictures:
Ladder parts are not included, please order separately.

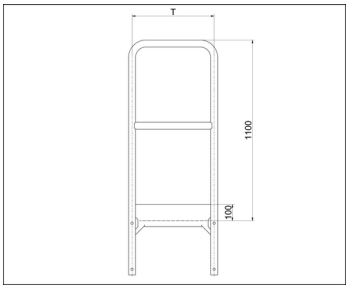

Specifications

Ladder rail 40x20mm	✔
Slip resistance	R11
Material	Stainless steel 1.4301 / AISI 304

Copyright © 2026 Hailo. Alle Rechte vorbehalten.

Depth in mm	750
Width (in mm)	500

Copyright © 2026 Hailo. Alle Rechte vorbehalten.