Rear safety guard for rail 72x25mm

6004611

GTIN: 4007126009265

The safety cage is fastened to the ladder rails and the exit rails at a maximum distance of 1,400 mm. The safety guard is also available as a ¾-rail – this is required with a side exit or a crossing unit. The entry to the safety cage must be between 2,200mm and 3,000mm in compliance with standards 14122, 18799 and 14094. The distance between the top of the safety cage and the exit level must be at least 1,000mm.

Material
Aluminium AlMgSi 0,3

Version | Rail dimension
3/4 bracket | Ø 42,4mm

- System components for the highest safety requirements
- In aluminum, stainless steel and galvanized steel
- High quality
- Tested according to the most stringent standards and safety regulations

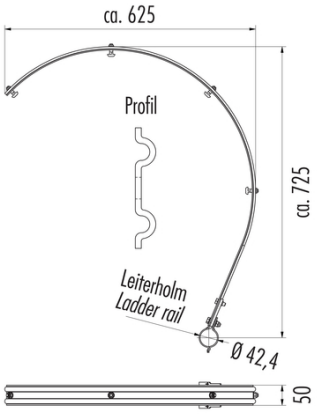

Specifications

Ladder rail 72x25mm	✔
Material	Aluminium AlMgSi 0,3
Version	3/4 bracket
Rail dimension	Ø 42,4mm
Version | Rail dimension	3/4 bracket | Ø 42,4mm

Copyright © 2026 Hailo. Alle Rechte vorbehalten.