



HAILO S100 PROFILOT

3-section aluminium combination ladder with LOT System for level adjustment.

THE KEY FEATURES


- LOT System: compensates for uneven ground up to 15 cm. Adjusted by pedal
- Versatile to use as a lean-to, extending or trestle ladder.
- 2 attachable full surface-contact feet and 2 large stable claw feet

OTHER PRODUCT ADVANTAGES

- Locking hook with transport locking mechanism
- Length and cross-profiled rungs
- With step adjustment option (9306-507 / 9309-507)
- Non-removable third ladder section (9312-507)
- Max. load capacity 150kg

PROPERTIES

- Rungs: 2x6 + 1x5
- Working height: max. 470 cm
- Weight: approx. 15.5 kg

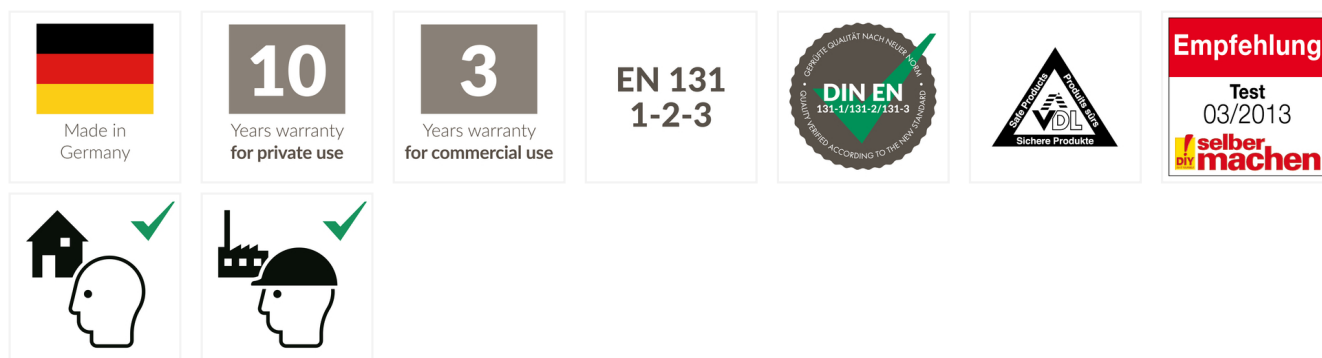

SPECIFICATIONS

Level of equipment		5
LOT System		✓
Can be used as lean-to ladder or free-standing ladder		✓
Can be used in a free-standing position		✓
Can be used as lean-to ladder		✓
Number of steps		2 x 6 + 1 x 5
Width/depth required for setting up lean-to ladder		A = 122 cm, B = 100 cm
Width/depth required for setting up extending ladder		A = 122 cm, B = 118 cm
Height of lean-to ladder		373 cm
Height of extending ladder		287 cm
Max. working height		469 cm
Max. working height of trestle ladder		278 cm

Max. working height of lean-to ladder



469 cm

Max. working height of extending ladder



331 cm

Dimensions of packaging (HxWxD)



A = 190 cm, B = 48 cm, C = 19 cm

Step adjustment max.



54 cm

Weight



15,5 kg