



HAILO S60 PROFISTEP UNO

Light and safe single ladder for house and garden use. Simply indispensable.

THE KEY FEATURES


- 2 large, stable claw feet on the crosspiece (7112-007 / 7115-007 / 7118-007)
- Wide uprights and rungs, extremely stable, double-beaded upright-rung joins
- Length and cross-profiled rungs

OTHER PRODUCT ADVANTAGES






- Weather-proof and maintenance-free
- Full surface contact feet
- Upright cross-section 72 x 25 x 1.20 mm
- Rung cross-section 30 x 30 mm
- Rung spacing 280 mm
- Max. load capacity 150kg

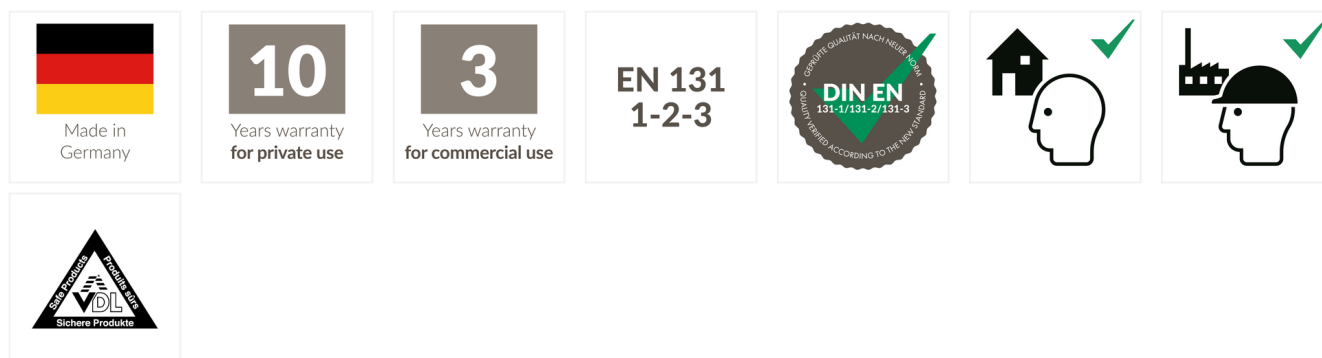PROPERTIES

- Rungs: 6
- Working height: max. 270 cm
- Weight: approx. 2.8 kg



SPECIFICATIONS

Level of equipment		3
Can be used as lean-to ladder		✓
Number of steps		6
Width/depth required for setting up lean-to ladder		A = 34 cm, B = 44 cm
Max. working height		270 cm
Max. working height of lean-to ladder		270 cm
Dimensions of packaging (HxWxD)		A = 171 cm, B = 34 cm, C = 8 cm
Weight		2,8 kg