



## Attica crossing for rail 40x20mm

**6031345**

GTIN: 4007126265456


The bridging step is used to bridge and protect the parapet and any facing without slip resistance. The length of the bridging step is variable, the passage width must be at least 500 mm. In accordance with DIN 18799-3, fixed ladders with a fall height of 3m or more require a fall arrest system at the exit point so that the user is never unsecured. This is ensured with a guardrail of 1,500 mm on both sides or the parapet step-over unit with a depth of 2,500 mm.

### Material

hot galvanised steel 1.0037 / ASTM A36

### Depth in mm

2500

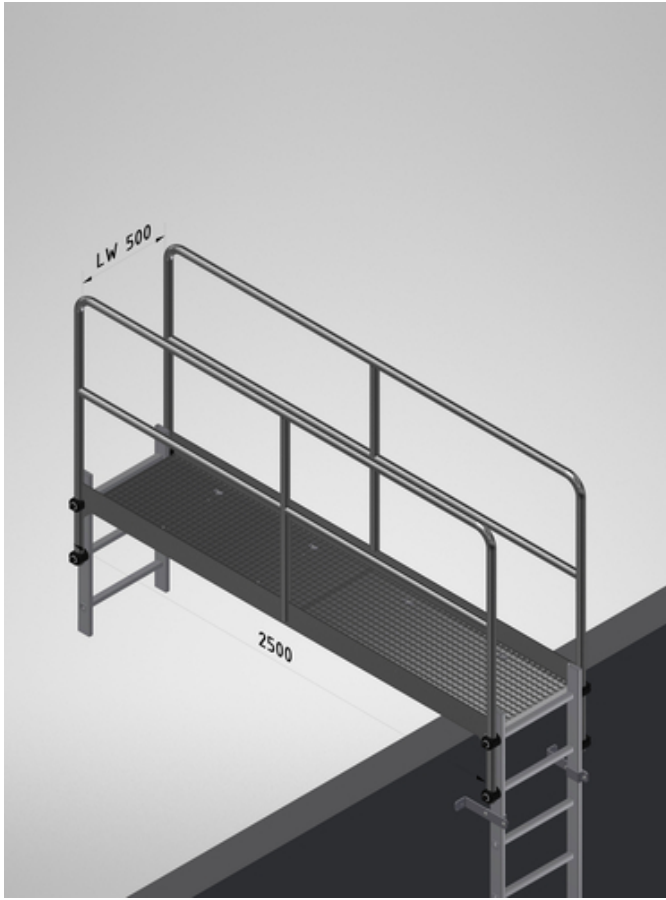


- Bridging the attic
- Blinding the attic
- LW: 500mm

Note on pictures:

Ladder parts are not included, please order separately.

### Specifications

|                     |  |
|---------------------|--|
| Ladder rail 40x20mm | ✓                                      |
| Slip resistance     | R11                                    |
| Material            | hot galvanised steel 1.0037 / ASTM A36 |

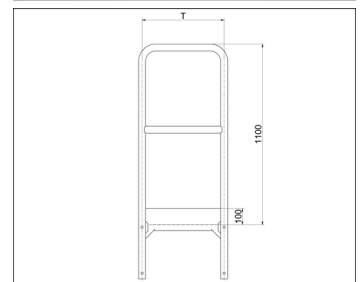

# PRODUCT SPECIFICATION SHEET

---



|               |      |
|---------------|------|
| Width (in mm) | 500  |
| Depth in mm   | 2500 |