

HS8 burglar proof (RC3 - DIN 1627) in stainless steel 1.4301 / AISI 304 load class B/D - EN124

9508361

GTIN: 400712626600 2

Shaft cover flush to the ground, suitable for cars (EN 124 class B) or trucks (EN 124 class D), approved for flowing urban traffic. Safe operation with gas pressured springs as opening aid and self-engaging cover. Lid with integrated seal. Locked by closure with brass nut for male triangular wrench. Incl. the necessary number of anti-burglary lock inserts (burglar resistance class RC3 according to DIN 1627) with drill-proof and pull-proof security lock. Deeper locking covered by three-sided brass bolt. Other sizes, versions and materials on request.

Width in mm
600x600 mm

Load class
B 125kN - EN124

- Burglar-resistant - tested by IFT Rosenheim
- rectangular design
- Surface water proof
- safe to drive on
- odour proof
- for installation at ground level
- stainless steel 1.4301/ASTM 304
- incl. the necessary number of anti-burglary lock inserts (burglar resistance class RC3 according to DIN 1627) with drill-proof and pull-proof security lock






options on request:

- square and multi-part design
- material 1.4571 / ASTM 316Ti or galvanized steel
- emergency unlocking to allow the cover to be opened from below
- internal railing
- safety guard rail in various versions
- backpressure/flood proof 0.2 bar
- cover with 50mm trough for filling by customer
- electric or hydraulic opening

Note: Not all optional equipment can be freely combined.

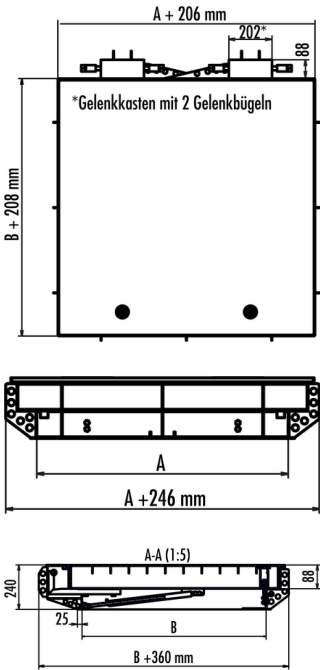

Specifications

Burglar resistance	RC3 according to DIN 1627
Material	Stainless steel 1.4301 / AISI 304
Thightness	surface water proof and odour proof
flush with ground	✓
rectangular	✓
suitable for moving traffic	✓
Load class	B 125kN - EN124
Width in mm	600x600 mm

