

HS8-ECO burglar proof (RC3 - DIN 1627) in stainless steel 1.4301 / AISI 304 load class D - EN124


9544111

GTIN: 400712626612 5

The shaft cover is flushed with ground, with inside hinges and self-aligning positioning mechanism and gas-pressurised spring as opening aid. Locking: It's locked by means of screws with brass screw for hook key, incl. the necessary number of anti-burglary lock inserts (burglar resistance class RC3 according to DIN 1627) with drill-proof and pull-proof security lock. Other materials, e.g. galvanized steel 1.4571/ASTM 316 ti, sizes (including rectangular) on request. Multi-part version possible.

Width in mm
600x600 mm

- burglar proof - tested by IFT Rosenheim
- rectangular design
- surface water proof
- safe to drive on
- odour proof
- for installation at ground level
- incl. the necessary number of anti-burglary lock inserts (burglar resistance class RC3 according to DIN 1627) with drill-proof and pull-proof security lock

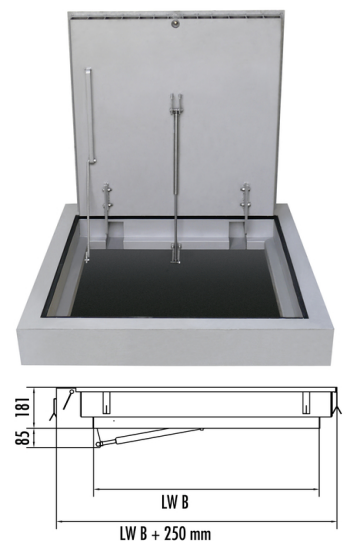

Specifications

Burglar resistance

RC3 according to DIN



	1627
Material	Stainless steel 1.4301 / AISI 304
Thightness	surface water proof and odour proof
flush with ground	✓
rectangular	✓
for traffic-calming zones only	✓
Load class	D 400kN - EN124
Width in mm	600x600 mm

