



## Platform stairs, inclination 45°

**6073881**

GTIN: 4007126264268

With its mobile, modular ALU platform steps, HAILO offers a mobile version for use on shelving, storage facilities or assembly work in accordance with the European standard EN ISO 14122.

Step width (mm)  
1000


Number of steps  
5

A robust chassis combined with high-quality swivel castors Ø160mm and the HAILO central braking system allow you to move quickly and stand securely.

Depending on your requirements, you can select different angles of inclination for the stairway and different tread widths for the steps. All variants are ergonomically optimized and thus enable the user to ascend and descend safely and comfortably.

They are supplied in pre-assembled modules, which reduces the time and effort required for final assembly. Detailed assembly instructions are included in the delivery.



Special designs are of course available on request.

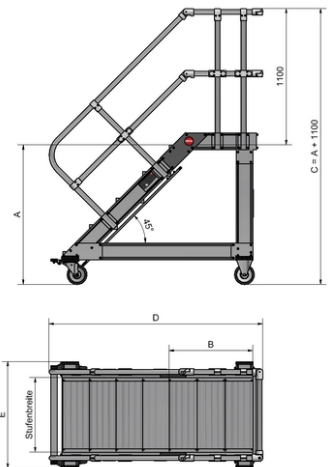

- Robust chassis with Ø160mm castors
- Central brake function
- Modular construction system
- Platform length 675mm
- With handrail on both sides and 3-sided guardrail as standard
- Non-slip ribbed steps & platform
- Quick assembly thanks to pre-assembled components

Options on request:

- 75° variant for confined spaces

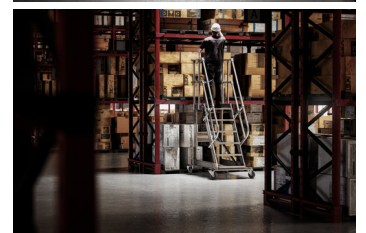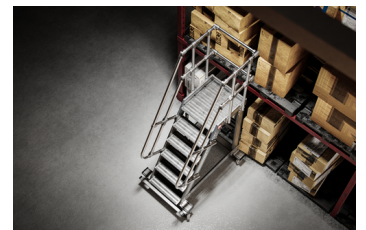



- R13 slip resistance for steps and landing
- Version for outdoor use

## Specifications

Material	Aluminium AlMg3 / AlMgSi 0,5
Inclination	45°
Step depth (mm)	225
Handrail (in mm)	Ø 40
Platform length (mm)	Standard 675
All-round railing	✓
Step width (mm)	1000
Number of steps	5
Vertical height (mm)	1125
Platform depth (mm)	675
Total height (mm)	2225
Total depth (mm)	1725
Total width (mm)	1260
Weight (KG)	99
Product code	PT-F-1000-45-5-P2-GB-I